

SERIE S

Features


- Globe configuration
- Female thread BSP 1 1/2" and 2"
- Flow control
- Accepts Irritrol OmniReg pressure regulator
- Internal manual bleed
- Nylon reinforced with fiberglass body and bonnet
- Double beaded diaphragm
- Working pressure 0,7 to 10 bars
- Solenoid 24 VAC 50 Hz
 - In rush cur-rent 0,34 Amp;
 - holding current 0,20 Amp.

Special Features


- Fast and slow closing
- Internal filter removable from top
- Non rising stem

Code

IT-VIS040	S-Series 1" 1/2 FBSP
IT-VIS050	S-Series 2" FBSP

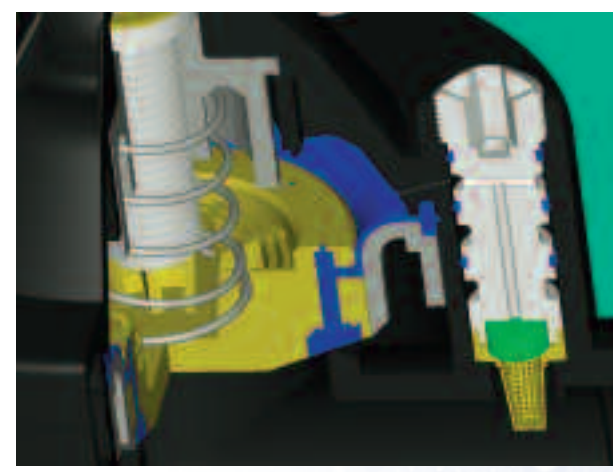

Headloss Table

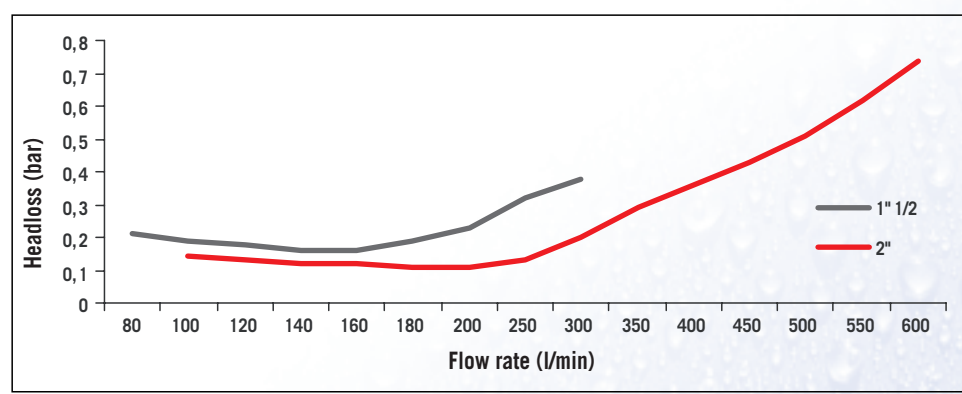

*Irritrol Systems Europe S.r.l.
may change product specifications
without prior notice and without liability*