

WATERPROOF CONNECTOR

Applications


To connect your electric - valve to the controller or to the Irricod Systems.

Features

- Waterproof connection
- Operating temperature: 105°C maximum
- The waterproof connection consists in a clamp (red or yellow) to fix the wires. The clamp is inserted into a plastic tube filled with an insulating gel to insure water proof connection.

Specifications

- Yellow clamps: 2 - 6 mm²
- Red clamps: 5- 10 mm²
- Suitable for electrical connection up to 30 V.

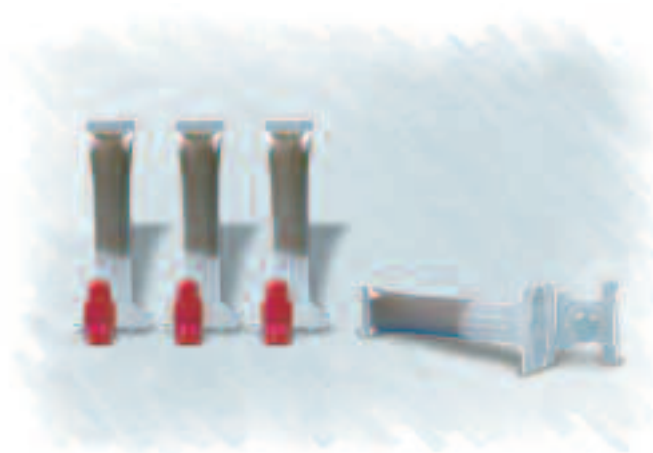


Code

IT-VCCR	Red clamp. Sections 5-10 mm ² , max tension 30 Volt
IT-VCCY	Yellow clamp. Sections 2-6 mm ² , max tension 30 Volt
IT-VCCDB	Plastic tube with insulating Gel for red clamp
IT-VCCDB1	Plastic tube with insulating Gel for yellow clamp

SUPER BLUE FLEX HOSE

Features

- Very low density polyethylene
- Maximum working pressure, 5,5 bar at 35°C
- Reel length: 30 metres
- Inside tube diameter 12,5 mm.
- Minimum wall thickness 2,4 mm.
- Shrink-wrapped coils
- Compatible with all fittings ranges of: Olson E-Z-Ell, Dura, Toro, Rain Bird and many others.
- The reels are wound to allow unwinding from center of coil.

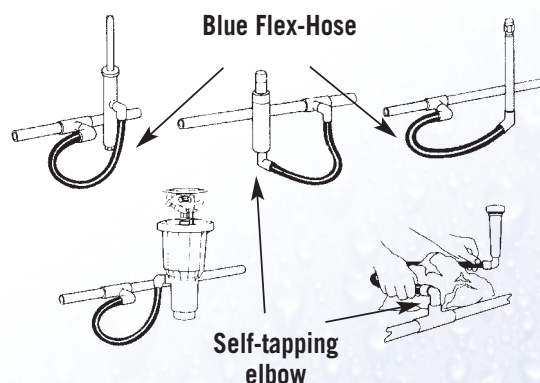

Code

EHD1295-010 Blue Flex-Hose