

UNI-Spray™ Series

2", 4", 6" (5,1 cm, 10,2 cm, 15,2 cm)


- Pressure-activated, multi-functional wiper seal prevents excessive flow-by and water waste. Keeps debris from entering upon retraction
- Durable two-piece stem ratchet allows for quick and easy nozzle pattern alignment
- Rugged cover and body provide durability in high pressure and surge conditions

Features

- Small exposed cover makes the unit virtually invisible for more attractive landscapes
- UNI-Spray™ accepts all Rain Bird® nozzles and accessories, which simplifies inventory management
- Economical 6-inch (15,2 cm) pop-up model provides for unobstructed watering of today's taller turf grass varieties
- VAN nozzle and screen are easily removable for flushing
- Internal parts removable from the top of the sprinkler for easy servicing
- Optional field installable Seal-A-Matic™ check valve prevents low head drainage up to 8 feet (2,4 m) of elevation difference
- Plastic and stainless steel materials resist corrosion


Operating Range (for pre-installed nozzle choices)

- Spacing:
 - 10 VAN Series: 8 to 10 feet (2,4 to 3,0 m)
 - 12 VAN Series: 10 to 12 feet (3,0 to 3,7 m)
 - 15 VAN Series: 12 to 15 feet (3,7 to 4,6 m)
 - 18 VAN Series: 14 to 18 feet (4,3 to 5,5 m)
- Pressure: 15 to 70 psi (1,0 to 4,8 bar)
- Optimum pressure: 30 psi (2 bar)
- Adjustable nozzle arc range: 0° - 360°

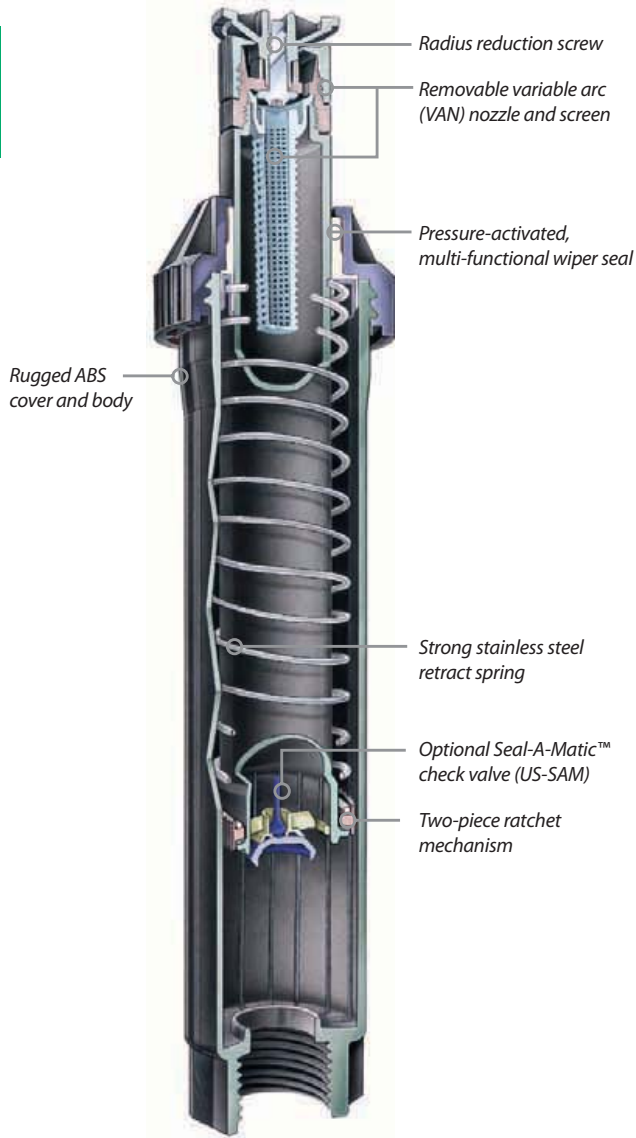

How To Specify

US - 4 - 15VAN



Variable Arc Nozzles
(10, 12, 15 or 18 feet)
may be ordered
pre-installed

Specifications

- Flow-by: 0 at 10 psi (0,75 bar) or greater;
0.20 gpm (0,04 m³/h; 0,60 l/m) otherwise

Dimensions

- 1/2" (15/21) NPT female threaded inlet
- Body height:
 - US-200: 3³/₄" (9,5 cm)
 - US-400: 5⁷/₈" (14,9 cm)
 - US-600: 8¹/₄" (21,0 cm)
- Exposed surface diameter: 1¹/₄" (3,2 cm)

Models*

- US-200: 2" pop-up height (5,1 cm)
- US-400: 4" pop-up height (10,2 cm)
- US-600: 6" pop-up height (15,2 cm)
- US-210 VAN 2" pop-up height (5,1 cm) with 10-VAN attached
- US-410 VAN 4" pop-up height (10,2 cm) with 10-VAN attached
- US-212 VAN 2" pop-up height (5,1 cm) with 12-VAN attached
- US-412 VAN 4" pop-up height (10,2 cm) with 12-VAN attached
- US-215 VAN 2" pop-up height (5,1 cm) with 15-VAN attached
- US-415 VAN 4" pop-up height (10,2 cm) with 15-VAN attached
- US-418 VAN 4" pop-up height (10,2 cm) with 18-VAN attached
- US-SAM UNI-Spray™ field installed check valve

* The UNI-Spray™ sprinkler body accepts all Rain Bird nozzles



UNI-Spray™



Optional UNI-Spray™
Non-Potable Cover
(page 33)