CONTROLLERS



Features

- 2, 4, 6 and 8 station models
- 2 independent programs
- Start times: 3 per program up to 6 daily starts
- Station run times from 1 min. to 9 hours & 59 minutes, in 1-minute increments
- Seven-day "Select-A-Day" calendar or "Skip Days" interval option from 1-30 days
- Water budgeting from 10 to 200%
- Manual start per station or program
- ON/OFF keys permit rainy weather shut-off
- Large liquid cristal display
- Face plate overlay and instruction manual supplied in English, Italian, Spanish, French and German
- External plugin transformer (included)
- Flashing "24 V" is displayed to indicate power failure
- Program erase code
- Start time stacking
- Master valve/pump start circuit

Specifications


- 2 "AA" 1,5 V alkaline batteries (not included) to maintain program in case of power failure
- 0,5 Amp. fast blow fuse
- Input: 220 VAC/50 Hz
- Maximum output per station: 24 VAC 0,35 Amp.
- Maximum total controller output: 24 VAC 0,5 Amp.



Junior Plus 4ST

С	0	d	e

JR+2+220	Junior 2 stations (external transformer)	
JR+4+220	Junior 4 stations (external transformer)	
JR+6+220	Junior 6 stations (external transformer)	
JR+8+220	Junior 8 stations (external transformer)	

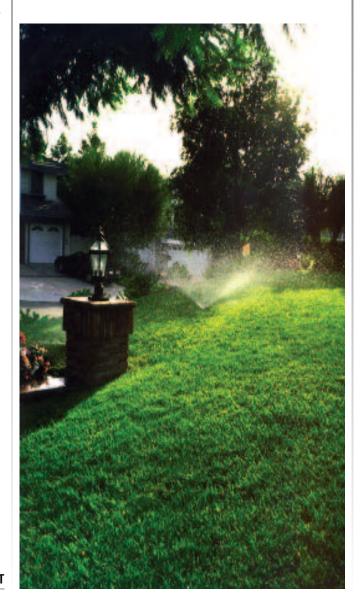

Irritrol.