

SELF-THREADING ELBOW

Features

- 1/2" or 3/4" male thread
- Automatic threading of the hose onto the elbow union without, teflon etc.
- 90° design for easy installation
- Maximum working pressure 7 bar
- Use it with Super Blue Flex Hose.



Code

IT-FEM1515	1/2" male Self-threading Elbow
IT-FEM2015	3/4" male Self-threading Elbow

SWING JOINT

Features

- Ready-made assembly that simplifies and speeds up installation of irrigation systems
- Essential for perfect ground levelling of sprinklers
- Suitable for large projects
- Body in Hi-Impact PVC
- 360° rotation in three directions
- Max. working pressure, 13,6 bar at 22°C
- Seal guaranteed by O-ring gasket.




Code

IT-TPK025	1" Swivel riser
IT-TPK040	1 1/2" Swivel riser


MODULAR MANIFOLD

Features

- For quick assembly of valve groups, without needing Teflon or adhesives
- Allows rotation of manifolds without leaks thanks to O-ring seal
- Simplifies servicing.

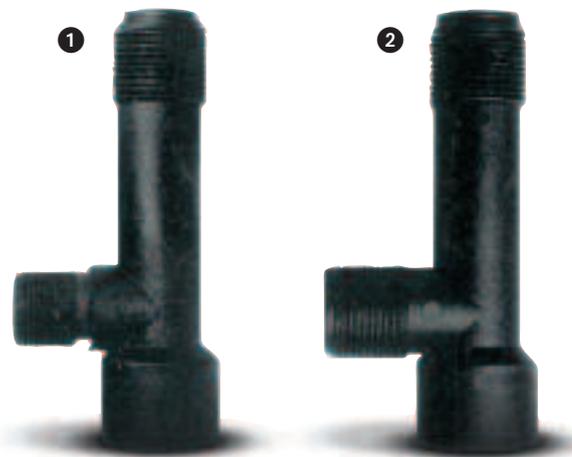

MANIFOLD DIMENSIONS (cm.)

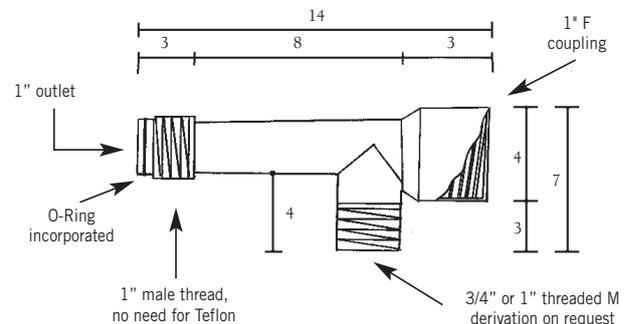

Code

IT-FMV020-1	1" F x 3/4" M x 1" M manifold (1)
IT-FMV025-1	1" F x 1" M x 1" M manifold (2)